


Product Data Sheet No H38C

Stainless Steel Polyurethane Castors –
single bolt fixing

- Use for laboratory equipment, catering applications, clean area products.
- Wheel diameters – 80mm, 100mm & 125mm
- Stainless steel housing – DIN standard 304 grade.
- Swivel head seal prevents ingress from grit.
- Hard wearing polyurethane tyre on nylon centre wheels. Quieter to run compared to nylon, high loads compared to rubber & less likely to cuts and wear.
- Choice of plain or roller bearing wheel.
- **Available as:**
Swivel castor & swivel castor with total stop brake – locks both swivel head & wheel.
- Single 12mm Centre bolt fixing.
- **Also available:** Expanding adaptor to fit castors to round or square shape hollow tube – telephone or email for details.

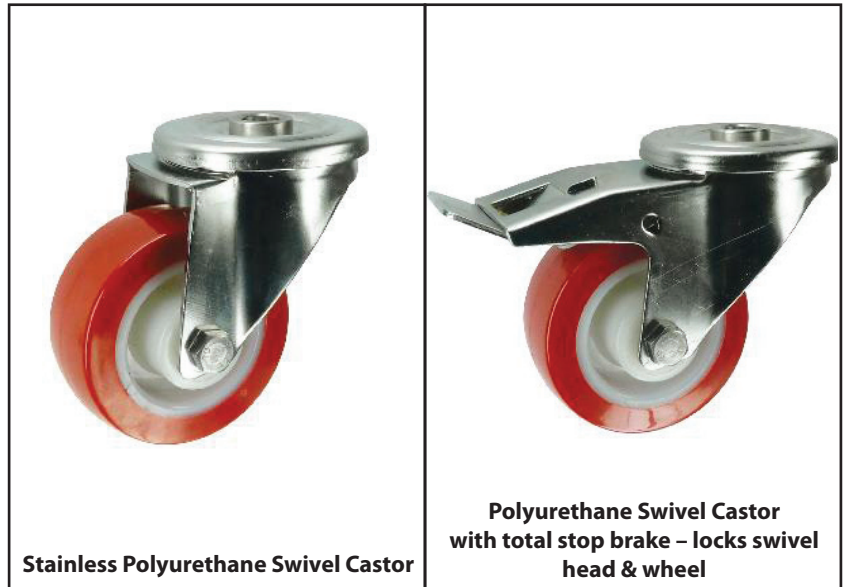

Wheel Type/Material	Nylon		
Wheel Diameter	80mm	100mm	125mm
Load Capacity per castor	150kg	150kg	200kg
Tread Width	32mm	32mm	35mm
Fitted Height	108mm	128mm	155mm
Swivel Offset	41mm	41mm	41mm
Bolt size	12mm bolt	12mm bolt	12mm bolt

Castors with PLAIN BEARING

Swivel Castor. Reference	H61S	H62S	H63S
Price	£19.00	£21.30	£24.20
Swivel Castor with brake. Ref.	H61B	H62B	H63B
Price	£23.00	£25.10	£28.80

Castors with ROLLER BEARING

Swivel Castor. Reference	H61SRB	H62SRB	H63SRB
Price	£19.90	£22.20	£25.10
Swivel Castor with brake. Ref.	H61BRB	H62BRB	H63BRB
Price	£23.90	£26.00	£29.70

NEXT DAY DELIVERY

For these castors & 1000's
of other stock products

HELP & ADVICE

For castor selection and
specifications, call our experts on
01243 607029

FREE DELIVERY

Orders over £90 value
(ex. VAT)

All prices exclude carriage and VAT. Free Delivery over £90 (ex.VAT) order value.

BASICS Castors - Division of BASICS Equipment Ltd., 72 High Street, Selsey, Chichester, West Sussex PO20 0QJ
Tel: 01243 607029 Fax: 01243 606597 Web: www.basicscastors.co.uk email: info@basicscastors.co.uk